

HAULERS & AMPHIBIOUS TRAILERS

FATXTRUCK®

INDUSTRIAL OFF-ROAD UTILITY VEHICLES



WE'LL GET YOU THERE™

**ZEAL
MOTOR**

101, rue de la Production
Cowansville, Quebec, Canada J2K 5H5
579.319.0060 | sales@zealmotor.com



WWW.FATTRUCK.COM

HAULERS & AMPHIBIOUS TRAILERS

SPECIFICATIONS

AMPHIBIOUS TRAILER *

Interior width	45 in (1138 mm)
Total width	100 in (2540 mm)
Interior length	99 in (2516 mm)
Total length	137 in (3470 mm)
Height	66 in (1676 mm)
Base weight	1465 lb (665 kg)
Axles	1
GVWR	5000 lb (2268 kg)
Payload on land	3535 lb (1603 kg)
Payload on water	2200 lb (1000 kg)
Ball type	Pintle eye
Connector	4 pins
Tire type	FAT TRUCK® LGP 1640 X 640 X 610 in
Tire inflation cold	4.5 PSI (31 kPa)
Rim	24 in
Brakes type	N/A
Steel type	Steel & Aluminum

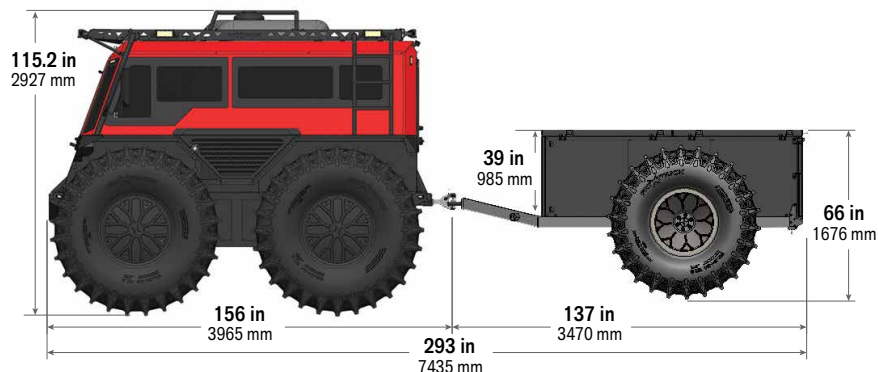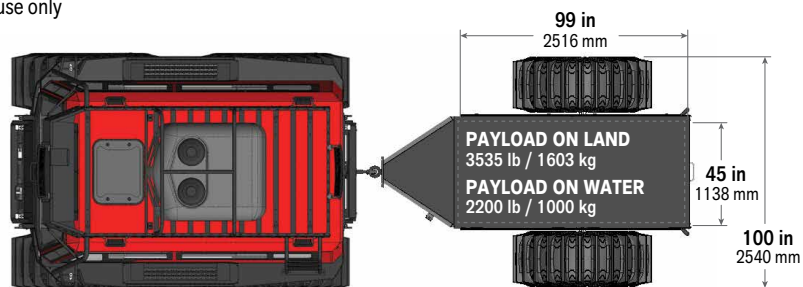

TRANSPORT TRAILER

Width	101 in (2565 mm)
Length	280 in (7112 mm)
Height	53.5 in (1352 mm)
Base weight	1800 lb (814 kg)
Axles	2
GAWR each axle	5000 lb (2268 kg)
Suspension type	Tandem
GVWR	9900 lb (4491 kg)
Payload	8275 lb (3753 kg)
Ball type	Ball type 2-5/16" or Pintle eye
Connector	7 pins
Tire type	ST 225/75 R15
Tire inflation cold	65 PSI (448 kPa)
Rim	15 x 6 J
Brakes type	Electric
Steel type	Aluminium
Certification	Transport Canada DOT

